

## SOFTWARE UPGRADE PROCEDURE FOR My-HD GALAXIS 99


**IMPORTANT:** Please note that after the software upgrade process your My-HD Galaxis 99 will reset into its factory default settings. All personal settings and favorite list will be deleted.

1. Download the Software file “CH05100572-B63\_DSD2104iMH IRDETO SIGNED APPLICATION SOFTWARE IMAGE (V1.67)” from the website.


Galaxis 99

1.67


June 2015

 Software Update

2. Extract the zip file and save the “Irdeto\_238\_07.SDL” file to the USB.

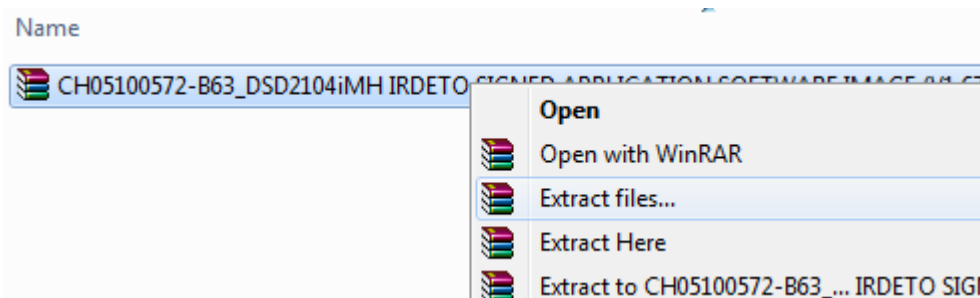


3. Ensure that “Irdeto\_238\_07.SDL” is placed in the root folder of your USB storage device.

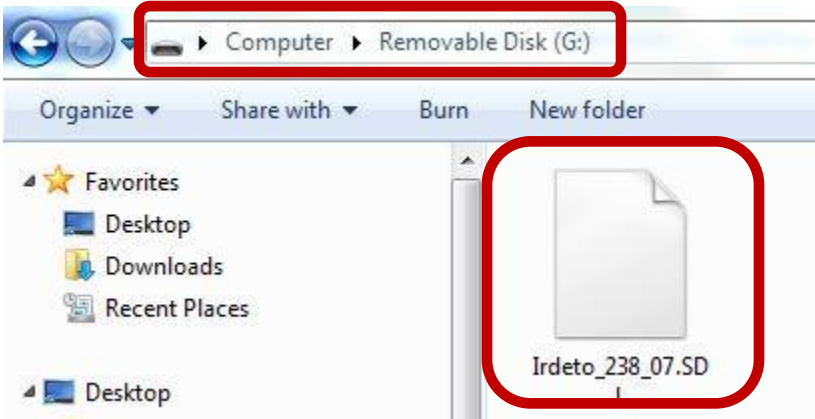


4. Insert the USB device into the side or rear USB slot.

5. Using your My-HD Galaxis 99 remote control, Press the **MENU** button, then Go to **SETTINGS**

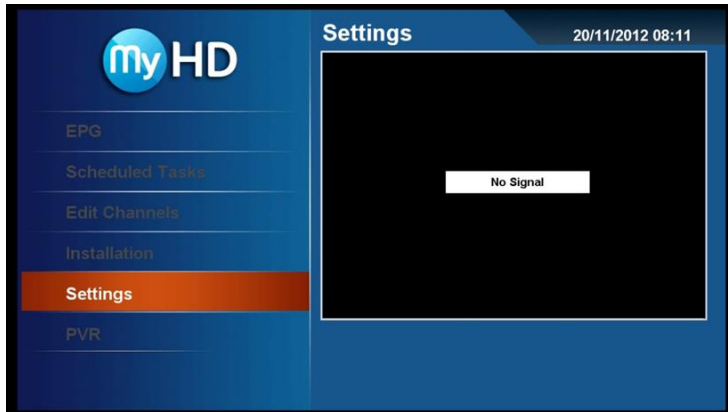


6. Select **SOFTWARE UPDATE**, Key in the pin code 0000, then press OK

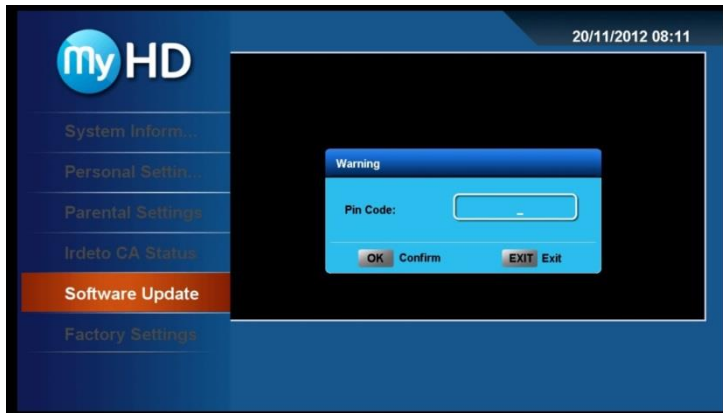


7. Select **USB UPGRADE** from the option, then press OK




8. Select **OK** to confirm

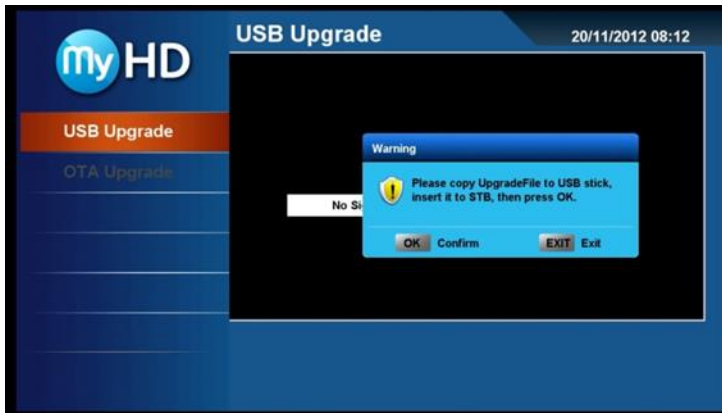

9. System will reboot and check for USB download.

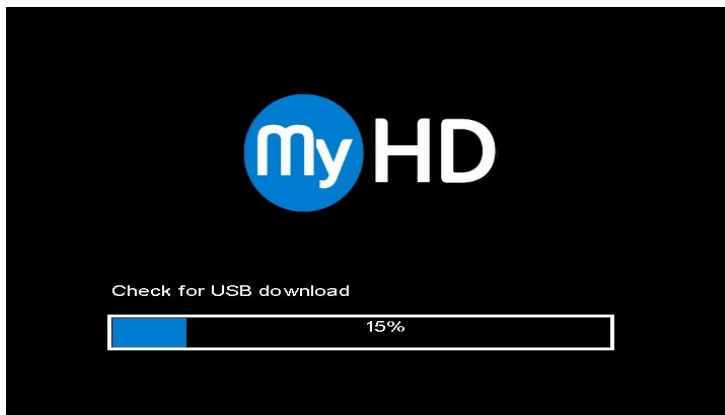

10. Software upgrade in process. During this time, **PLEASE DO NOT POWER-OFF THE UNIT OR PERFORM ANY OTHER OPERATION THAT MIGHT DISRUPT THE UPGRADE.**

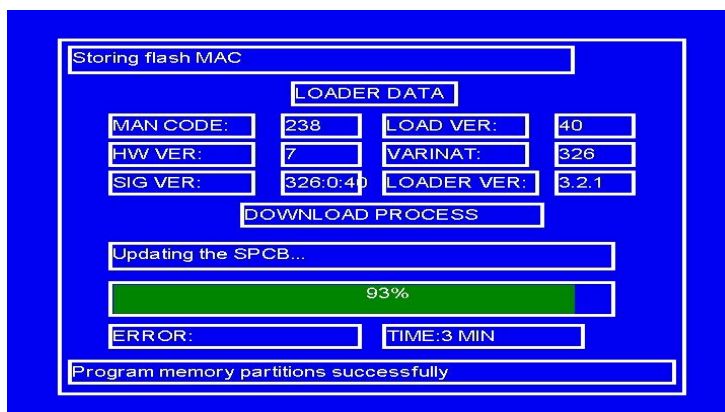

11. Once software upgrade is complete, My-HD Galaxis 99 receiver will reboot, and will go to the screen below.

